

Müthing


THE NEW MU-FM VARIO



ONE FOR ALL.
ALL IN ONE.

Maximum flexibility
with the new Müthing MU-FM Vario.

MODULAR AND FLEXIBLE DESIGN OF THE ATTACHMENT VARIANTS

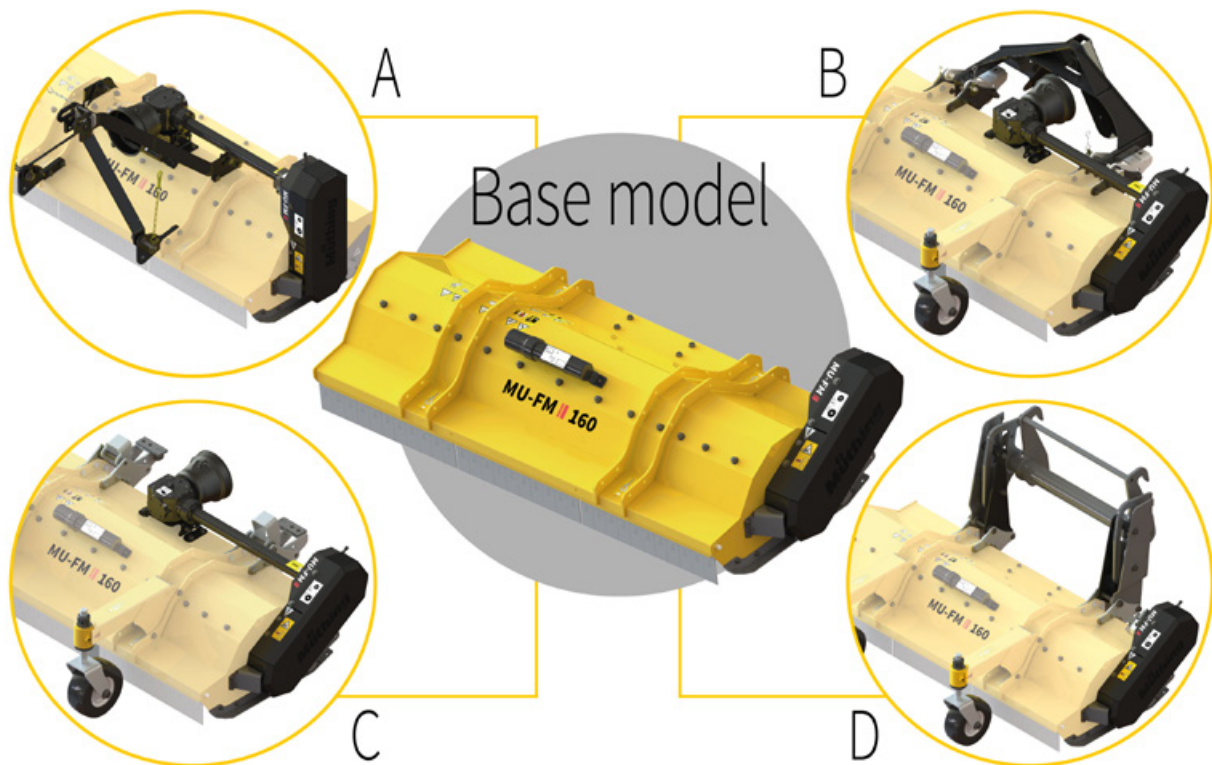

MU-FM VARIO

The Müthing modular principle with configuration examples

- A: Front/rear attachment with 3-point linkage
- B: Front attachment with coupling triangle
- C: Front attachment with 2-point linkage
- D: Front attachment with hydraulic drive



Müthing flail mowers - Stay one step ahead with certified safety! Europe's agricultural machinery manufacturers have to manufacture their machines in accordance with CE machinery directives. Applying the CE marking is a self-declaration of compliance with the CE directives. One of these CE machinery directives is entitled: "Thrown-object test and acceptance criteria for flail mulchers as per ISO/WD 17101-2".



We went one step further and commissioned an independent, accredited institute - TÜV Nord - to assess and certify our compliance with this machinery directive. **Your advantage: Maximum safety and worry-free operation** with observance of the safety clearances of 8 metres towards the front and rear and 2 metres towards the right and left.

NEW

Optimised front support wheels with easily accessible maintenance points

Improved drive concept

Variable coupling points for all mounting parts and supporting legs

User-friendly support roller adjustment in a new design

Optionally available lightweight and noise-reducing plastic wear insert




CUSTOMER REQUIREMENTS AND WORK RESULTS ARE OUR PRIORITY

The new MU-FM Vario series with intelligent modular system: Flexible and robust due to its versatile configuration options.

- Can be used either as a front or rear attachment and also on small wheel loaders and telescopic handlers
- Vario cutting bar for variable adjustment of the cutting length
- Numerous gear box variants with respect to gear box position, rotational speed and direction of rotation
- Output range of 20-50 HP
- Various hydraulic drives for 35-70 l/min (gear motor or axial piston motor)
- Working widths of 1.20 m, 1.40 m and 1.60 m

Cross-section of MU-FM Vario with

short-cut angle (1), Vario cutting bar (2) and shark fin (3).

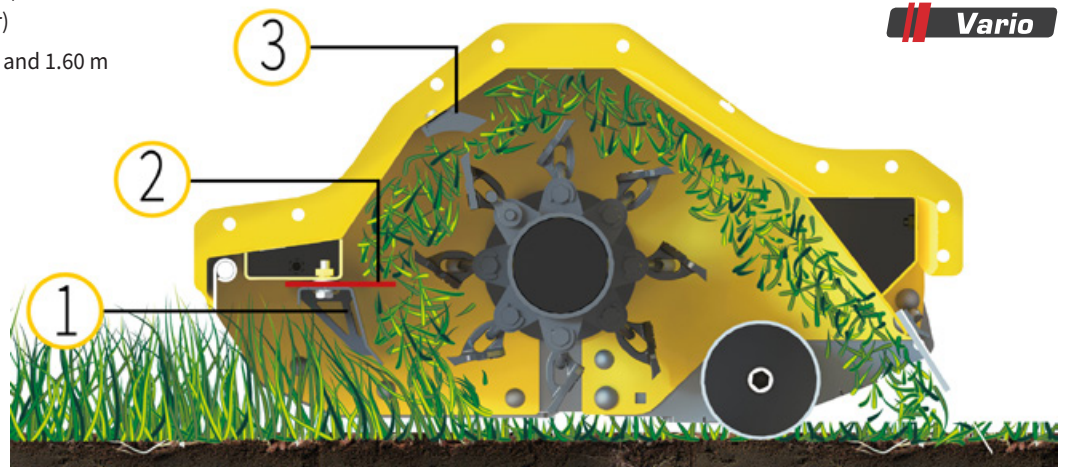

YOUR BENEFITS:

- Simple handling
- Maximum flexibility
- Exceptional work results
- Maximum safety thanks to thrown-object test

Muthing

Vario

ALWAYS OPTIMALLY CONFIGURED



Müthing MU-FM VARIO Front with 2-point linkage



Müthing MU-FM VARIO Front with hydraulic drive



Müthing MU-FM VARIO Front/Rear with 3-point linkage, Cat. 1



Müthing MU-FM VARIO Front/Rear with 3-point linkage, Cat. 1

Your Contact:

Müthing

Müthing GmbH & Co. KG Soest

Am Silberg 23
D-59494 Soest

Tel. +49 (0) 2921 96510

Fax + 49 (0) 2921 73080

soest@muething.com

Müthing GmbH & Co. KG Uffenheim

Am Brunnlein 2
D-97215 Uffenheim

Tel. +49 (0) 9842 98660

Fax + 49 (0) 9842 986667

uffenheim@muething.com

www.muething.com

